Product she M50

Eamily member of the time proven Euroemme[®] fan range

- Shutters are made of pressed galvanised steel in order to ensure highest strength
- Patented centrifugal system permits an energy efficient solution



All metal products from Munters are made in Munters Protect.

ErP

The coating technology

process and hence the corrosion resistance present in Munters Protect steel coating. The protection against perforation of the metal is far more long-lived than the traditional hot dip galvanization.


Today Munters Protect is the best anticorrosion protection on the market.

EM50

EM50 is a further development of the well-recognized and proven line of Euroemme® box fans and is the ideal exhaust fan whenever extra high airflow capacity is required. The propeller shape allows the highest efficiency and reliability in any agricultural environment. The square fan housing and air conveyor (Venturi) are made of Munters Protect coated sheet-steel. To improve aerodynamic efficiency, the fan has been developed in Munters Italy's R&D lab while the performances were confirmed by tests performed in BESS Lab at the Agricultural Engineering Department of University of Illinois – USA. The propeller is attached to pulley which is mounted onto an aluminium hub with an embedded double ball bearing for protection against water ingress. The belt transmission ensures low propeller rpm, which in turn ensures high efficiency and low energy consumption as well as low noise. The shutter is made of Munters Protect coated steel, which is stronger than aluminium and plastic. The fan shutter is tightly closed when the fan is not working, preventing any air leakage through the fan. The patented centrifugal system prevents the shutter from being closed by air pressure. The shutter does not have to be cleaned regularly as dust does not affect its opening and closing movement. All the plastic parts are made of black acetalic plastic with UV protection.





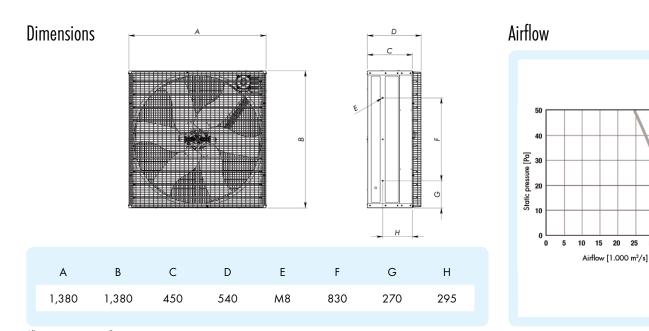

All measurements are in millimiters.

Technical specifications

		1.0 Hp	1.5 Hp
Number of blades		6	6
Number of shutter blades		10	10
Propeller diameter	mm [inch]	1,270 [50]	1,270 [50]
Weight of fully equipped fan ¹	[kg]	84	86
Efficiency grade ²		40.1	40.3
Airflow at 0 Pa ³	m³/h [cfm]	37,000 [21,800]	42,400 [25,000]
Airflow at 25 Pa ³	m³/h [cfm]	32,500 [19,200]	38,400 [22,600]
Airflow at 50 Pa ³	m³/h [cfm]	26,200 [15,400]	33,800 [19,900]
Specific performance at O Pa ³	m³/h /W [cfm /W]	33.9 [20.0]	27.0 [15.9]
Max. operating temperature	°C [°F]	50 [122]	50 [122]
Max. operating pressure	Pa	50	50
IEC protective class of electric motor		IP55	IP55
Electric motor winding insulation grade		F	F

¹ Excludes safety kit for installation below 2.7m above the floor.
² According to the requirements of the European ErP Ecodesign Directive 2009/125/EC.
³ All declared values are measured and certified by Bess Lab (test #13611 and #13613). Airflow data are measured at standard conditions (20°C, 1,013 hPa).

Euroemme® EM50 exhaust fan is developed and produced by Munters Italy S.p.A., Italy

Australia Phone + 61 2 8843 1588, agh.info@munters.com.au, Brazil Phone +55 41 3317 5050, contato@munters.com, Canada Phone +1 517 676 7070, aghort.info@munters.com, China Phone +86 10 8048 3493, marketing@munters.cn, Denmark Phone +45 98 623 311, aghort@munters.dk, India Phone +91 20 6681 8900, info@munters.in, Indonesia Phone +66 2 642 2670, info@munters.co.th, Italy Phone +39 0183 5211, info@munters.it, Japan Phone +81 3 5970 0021, mkk@munters.ip, Korea Phone +82 2 7618 701, munters@munters.co.kr, Mexico Phone +52 818 2625 400, dhinfo@munters.com, Singapore Phone +65 7 446 828, info@munters.com.sg, South Africa and Sub-Sahara Countries Phone +27 11 997 2000, info@munters.co.za, Spain Phone +39 0183 5211, info@munters.it, Sweden Phone +46 8 6266 300, info@munters.se, Thailand Phone +66 2 6422 670, info@munters.co.th, Turkey Phone +90 262 7513 750, info@muntersform.com, USA Phone +1 517 676 7070, aghort.info@munters.com, Export & Other countries Phone +39 0183 5211, info@munters.it



Your closest distributor

30 35 40 45

1.0 hp